





BM24 Series

Small Hybrid Board to FPC Connectors up to 5 Amps

MKT-E-13094F_2

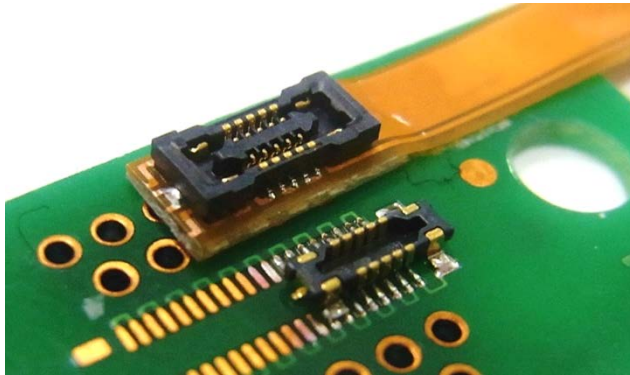

◆ Connection Image

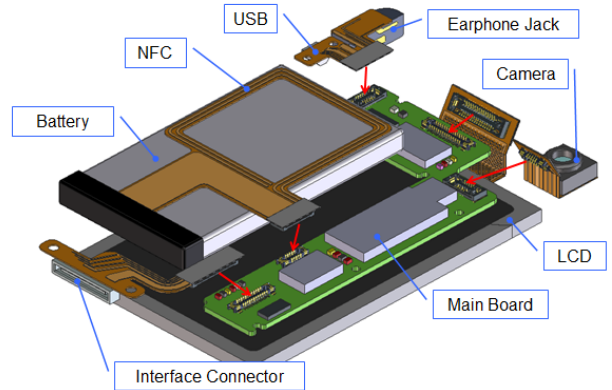

◆ Features

1. Power & signal hybrid connector is suitable for power line connection in various applications
2. Space saving design:
2.3 x 5.25 mm (10 pos.) with 0.8 mm height, 0.35 mm lead pitch
3. Rated current: 5 Amps for power, 0.25 Amp for signal
4. Supports USB3.0 transmission
5. Highly reliable 2-point contact structure
6. Guidance ribs for 0.3 mm self-alignment range
7. RoHS compliant, Halogen-free product*1


◆ Specifications

COMPONENT	MATERIAL	FINISH
Housing	LCP*1	UL94V-0, Black
Contact	Copper Alloy	Gold plated over Nickel under plating


Rated Current	Power Contact: 5 Amps, Signal Contact: 0.25 Amp
Rated Voltage	30 V AC/DC
Operating Temperature	- 40 to + 85 °C*2
Contact Resistance	Power Contact: 15 mΩ, Signal Contact: 100 mΩ (Measured at 20 mV AC, 1 kHz, 1mA)
Withstanding Voltage	150 V AC for 1 minute
Insulation Resistance	100 MΩ MIN. (100 V DC)
Durability	10 times

◆ Up to 5 Amps/ Power Contact

Temperature rising with 5 Amps current carrying is less than 30 °C

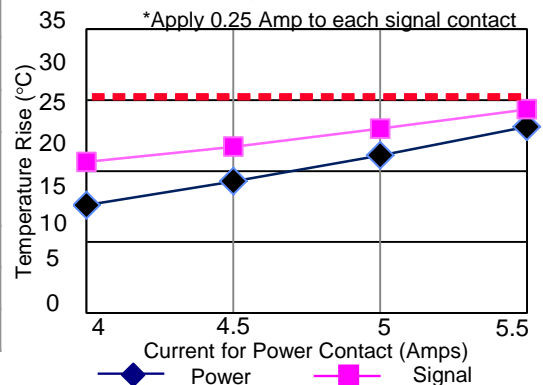

Pattern Width: 4 mm
PCB FR-4: 70 x 20 x 0.8
Copper Foil: 35 μm



◆ Variations

10, 20, 24, 30, 40 pos.

*1: This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 ppm maximum bromine, and 1500 ppm maximum total of chlorine and bromine.

*2: Include the temperature rising by current carrying.

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.